

PVC General Purpose Hose

An affordable, general purpose hose ideal for low temperature applications, and for the transfer of air, water and mild water-soluble chemicals. Also, general industrial applications including factory air lines, automation machinery, pneumatic lines and tools, nail guns, paint spray systems, etc. Resistant to the ozone, U.V. and abrasion, and moderately resistant to oil. The braided cord polyester reinforcement results in an extremely flexible hose. Electrically non-conductive and suitable for high working pressure under harsh conditions.

CONSTRUCTION:

Core: Black PVC
Reinforcement: High Tensile Strength Yarn
Cover: PVC
Temperature Range: +25°F to +150°F (-4°C to +65°C)
Colors: Red or Blue



PART NO.		I.D.	APPROXIMATE O.D.	WORKING PRESSURE 70°F (psi)	FULL COIL	PRICE PER FOOT
RED	BLUE					
PVC-14R	PVC-14B	1/4"	0.450-0.500"	300	500'	\$.32
PVC-516R	PVC-516B	5/16"	0.520-0.625"	250	500'	\$.41
PVC-38R	PVC-38B	3/8"	0.590"	300	500'	\$.39
PVC-12R	PVC-12B	1/2"	0.750"	300	500'	\$.48
PVC-58R	PVC-58B	5/8"	0.895"	200	300'	\$.73
PVC-34R	PVC-34B	3/4"	1.000-1.020"	275	300'	\$.81
PVC-1R	PVC-1B	1"	1.313"	150	300'	\$1.06



Sold in full coils only.

Delivery 2-3 Days ARO


A restocking charge applies on cut hose being returned.

PVC Reinforced Hose

Crystal clear for see-through confirmation of flow, this silicone-free hose is good for general industrial applications, including factory air and water lines, automation machinery, pneumatic lines, food and beverage dispensing lines, potable water transfer, air breathing lines, and packaging machines. Braid cord polyester reinforcement results in an extremely flexible hose. Lightweight and non-marking. Suitable for high working pressure under harsh conditions.

CONSTRUCTION:

Core: Compounded from Non-toxic Crystal Clear PVC
Reinforcement: Spiraled Polyester Yarn
Temperature Range: +25° F to +150°F (-4°C to +65°C)
Color: Clear

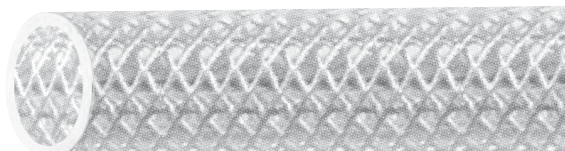

PART NO.	I.D.	APPROXIMATE O.D.	WORKING PRESSURE 70°F (psi)	FULL COIL	PRICE PER FOOT	
					25'	Full Coil
PVC-14C	1/4"	.438-.440"	275	300'	\$.33	\$.31
PVC-516C	5/16"	.490-.531"	275	300'	\$.43	\$.41
PVC-38C	3/8"	.590-.594"	275	300'	\$.45	\$.43
PVC-12C	1/2"	.750"	275	300'	\$.59	\$.56
PVC-58C	5/8"	.870-.891"	275	200'	\$.74	\$.71
PVC-34C	3/4"	1.020-1.031"	275	200'	\$.98	\$.94
PVC-1C	1"	1.300-1.310"	150	200'	\$1.20	\$1.16
PVC-114C	1 1/4"	1.620-1.630"	100	100'	\$2.10	\$2.02
PVC-112C	1 1/2"	1.930-1.938"	80	100'	\$2.38	\$2.29
PVC-2C	2"	2.490-2.500"	70	100'	\$4.21	\$4.00

CLAMP SIZES		
Worm Gear	1 Ear Clamp	2 Ear Clamp
PSHC-4	EC113	EC1113
PSHC-4	EC145	EC1315
PSHC-6	EC170	EC1518
PSHC-8	EC198	EC1720
PSHC-10	EC241	EC2023
PSHC-12	--	EC2528
PSHC-16	--	--
PSHC-24	--	--
PSHC-28	--	--
PSHC-36	--	--

SFP reserves the right to over- or under-ship hose by 10% of length ordered. (Restocking charge applies on cut hose being returned.)