


Industrial Hose Comparison Chart

	PARKER DAYCO	BOSTON	GATES	GOODYEAR	THERMOID HKP
AIR & WATER	GST-II 7092 GST-II 7093	Industrial A/W Bosflex A/W	Economaster 1 Braid EconoFlex	Sureline Horizon	ValuFlex GS
		Marathoner	DuraFlex	Wingfoot GP	Mainliner Industrial
	MPT-II 7094 MPT-II 7095	Performer II	PremoFlex Plant Master 19B	Ortac	Versicon Maxecon 300
	Grizzly 7107			Gorilla	Hercules 400
SPECIAL APPLICATION AIR & WATER	Hydro-Aire		TufFlex	Pliovic	
	Therm-o-blue Therm-o-red		Thermo GPX	Myriade	
	HDW 7080 Creamery Washdown	Creamery Packing	Creamery 113 S	Plicord Wash Down	Dari-Preen Maxecon Wash Down
	Jiffy 7212	Easy Couple	Lock-On	Insta-Grip	
	Push-On 300 Spiral			Acala	Flex-Loc
		Contractors Water			Contractors Water
		Contractors Water PVC			
PAINT & CHEMICAL	MPT-II 7094 MPT-II 7095				
	Paint Fluid 7108	Nyall	77B	N-R Spray	
PETROLEUM & GAS	Farm Pump 7188		Farm Skid Tank Gravity 5613	Agriculture Gasoline	Farm Tank
	LP Gas 7132		Butane-Propane 20B-HB		
	LP Gas 7232		Butane-Propane 20B-HB		

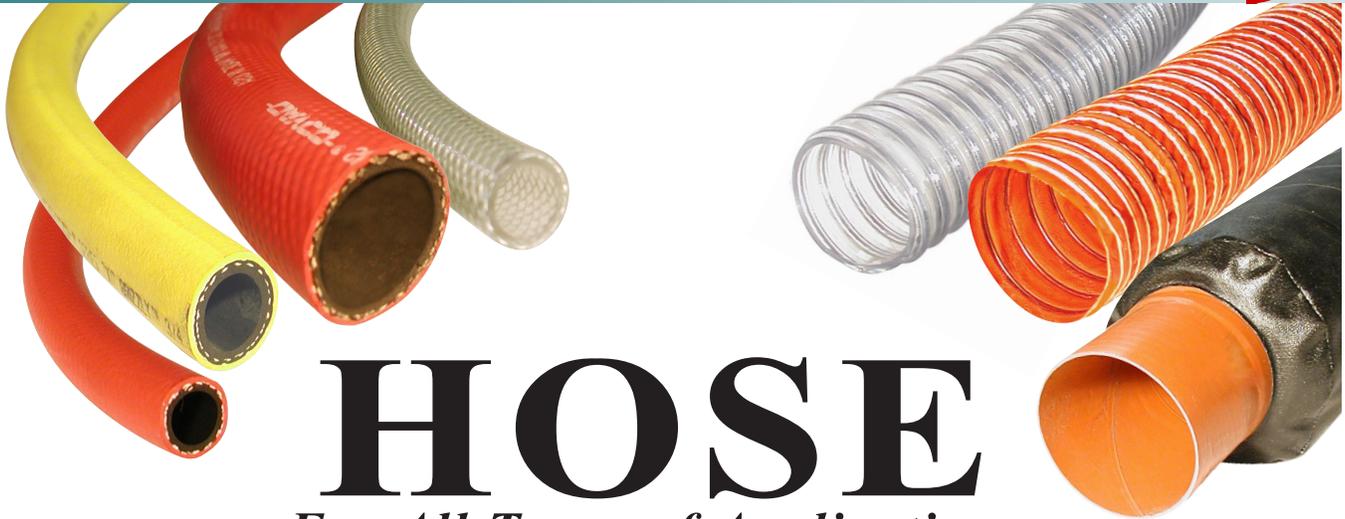

HOSE

For All Types of Applications



GST® II General Service Air & Water Hose



Economical and versatile general purpose hose. Excellent for air & water service. EPDM tube and cover resists heat, sunlight, ozone and weathering. GST II hose exceeds RMA class C medium oil resistance requirements. Suitable for applications such as oil mist lubricating air lines, but NOT suitable for the transfer of petroleum products. Closely plied reinforcement of high tensile textile core provides excellent coupling retention and kink resistance. 4:1 safety factor.

CONSTRUCTION:

- Tube:** Black EPDM
- Reinforcement:** Multiple Textile Plies
- Cover:** EPDM
- Standard Lengths:** Standard reel size varies
- Temperature Range:** -40°F to +212°F
- Fittings:** Standard Fittings with Clamps
- Colors:** Red or Black



PART NO.		HOSE I.D.	HOSE O.D.	MINIMUM BEND RADIUS	PRESSURE RATING (psi)	APPROX. FULL REEL QTY.	PRICE PER FULL REEL	
RED	BLACK							
7092-25RD	7093-25BK	1/4"	.550"	3.30	300	800'	Call for Pricing	
7092-31RD	7093-31BK	5/16"	.594"	3.50	300	750'		
7092-38RD	7093-38BK	3/8"	.688"	4.00	300	700'		
7092-50RD	7093-50BK	1/2"	.875"	5.00	300	500'		
7092-63RD	7093-63BK	5/8"	1.062"	5.50	300	450'		
7092-75RD	7093-75BK	3/4"	1.156"	6.00	300	400'		
7092-100RD	7093-100BK	1"	1.438"	8.00	300	300'		
7092-125RD	7093-125BK	1 1/4"	1.781"	9.00	200	250'		
7092-150RD	7093-150BK	1 1/2"	2.031"	10.00	200	200'		

CLAMP SIZES		
Worm Gear	1 Ear Clamp	2 Ear Clamp
PSHC-6	EC145	EC1315
PSHC-6	EC170	EC1518
PSHC-6	EC198	EC1518
PSHC-8	EC241	EC2023
PSHC-10	--	EC2528
PSHC-16	--	--
PSHC-20	--	--
PSHC-24	--	--
PSHC-28	--	--

* = Full Reels Only

SFP reserves the right to over- or under-ship hose by 10% of length ordered.

Jiffy® (Push-On) Heavy Duty 300 psi Air-Water-Oil Hose

This oil-resistant hose is excellent for use with air, water, mild chemicals and various petroleum products. Light, flexible, and couples in a jiffy; no clamps or special tools needed. Special braid angle for quick and secure push-on coupling retention. Available in various colors for color coding lines. Flame resistant cover is branded with MSHA legend. 4:1 safety factor.

CONSTRUCTION:

- Tube:** Black Nitrile
- Reinforcement:** One Textile Braid
- Cover:** Neoprene
- Pressure Rating:** 300 psi
- Standard Lengths:** Standard reel size varies
- Temperature Range:** -40°F to +200°F
- Fittings:** Push-on Fittings or Standard Fittings with Clamps
- Colors:** Black, Blue, Red, Gray or Green



PART NO.	HOSE I.D.	HOSE O.D.	WORKING PRESSURE (psi)	MINIMUM BEND RADIUS	APPROX. FULL REEL QTY.	PRICE PER FULL REEL	
7212-25 *	1/4"	.500"	300	3.00	700'	Call for Pricing	
7212-38 *	3/8"	.625"	300	3.00	700'		
7212-50 *	1/2"	.750"	300	5.00	600'		
7212-75 *	3/4"	1.031"	300	7.00	400'		

CLAMP SIZES		
Worm Gear	1 Ear Clamp	2 Ear Clamp
PSHC-4	EC145	EC1315
PSHC-6	EC170	EC1518
PSHC-8	EC198	EC2023
PSHC-16	--	--

*Insert the two letter abbreviation for the color of your choice: **BK** for Black, **BL** for Blue, **RD** for Red, **GY** for Gray, or **GN** for Green.

SFP reserves the right to over- or under-ship hose by 10% of length ordered.

Grizzly™ Extra Heavy Duty 500 psi Industrial Hose

Grizzly™ is a premium multiple purpose hose which combines the toughness of a braided hose with the flexibility of a spiral hose. Grizzly™ is extremely abrasion resistant and oil resistant. The hose meets MSHA IC-1230/20 flame resistance requirements and is non-conductive, with a minimum one megohm resistance per inch at 1000 volts DC.

CONSTRUCTION:

- Tube:** Black Nitrile
- Reinforcement:** 4 Spiral Textile
- Cover:** Yellow NBR/PVC Blend
- Pressure Rating:** 500 psi
- Standard Lengths:** Standard reel size varies
- Temperature Range:** -40°F to +212°F
- Fittings:** Standard Fittings with Clamps or Hydraulic Crimp Type
- Colors:** Yellow


The Tough Stuff!



PART NO.	HOSE I.D.	HOSE O.D.	WORKING PRESSURE (psi)	MINIMUM BEND RADIUS	APPROX. FULL REEL QTY.	PRICE PER FULL REEL	
7107-25	1/4"	5/8"	500	2.00	750'	Call for Pricing	
7107-38	3/8"	3/4"	500	2.50	600'		
7107-50	1/2"	7/8"	500	3.00	500'		
7107-75	3/4"	1-3/16"	500	4.50	400'		
7107-100	1"	1-1/2"	500	6.00	300'		

CLAMP SIZES		
Worm Gear	1 Ear Clamp	2 Ear Clamp
PSHC-4	EC170	EC1518
PSHC-6	EC198	EC1720
PSHC-8	EC241	EC2225
PSHC-16	--	--
PSHC-20	--	--

SFP reserves the right to over- or under-ship hose by 10% of length ordered.

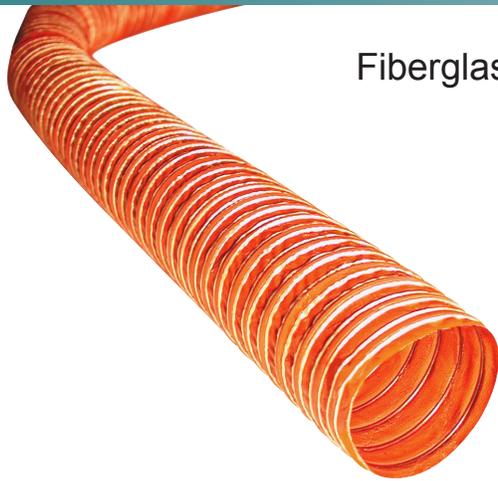

Fiberglass/Silicone Coated Dryer Hose

APPLICATIONS:

For hot or cold air handling, fume removal or ventilation from dryers, tanks or enclosures. Low pressure handling of gaseous materials. Our Fiberglass/Silicone series resists extreme temperatures, fungi and ozone. Fair resistance to alkalis, water, oils and solvents.

CHARACTERISTICS:

- Very Flexible at Low Temperatures
- Odor Free in Hot Air Service
- Excellent Electrical Properties
- Color: Orange

DH-4001
Single Ply Silicone Fiberglass

TEMPERATURE RANGE: -65°F to +550°F
1-Ply Silicone/Fiberglass with Spring Steel Wire Helix

DH-2001
Double-Ply Silicone Fiberglass

TEMPERATURE RANGE: -80°F to +600°F
2-Ply Silicone/Fiberglass Encapsulating a Spring Steel Wire Helix

FOR LONGER LENGTHS:

Simply twist sections together and cement with high-temp silicone for any length you need!

It's a great way to eliminate costly scrap pieces.

PART NO.	HOSE I.D.	WORM GEAR CLAMP	PRICE PER 12' SECTION
1-Ply		Sold in 12' sections	
DH-4001-0075*	3/4"	PSHC-10	
DH-4001-0100*	1"	PSHC-12	
DH-4001-0125*	1¼"	PSHC-16	
DH-4001-0150	1½"	PSHC-20	
DH-4001-0175	1¾"	PSHC-24	
DH-4001-0200	2"	PSHC-28	
DH-4001-0250	2½"	PSHC-36	
DH-4001-0300	3"	PSHC-44	
DH-4001-0350*	3½"	PSHC-52	
DH-4001-0400	4"	PSHC-64	
DH-4001-0500*	5"	PSHC-72	
DH-4001-0600*	6"	--	
DH-4001-0800*	8"	--	
DH-4001-1000	10"	--	
DH-4001-1200	12"	--	
2-Ply		Sold in 12' sections	
DH-2001-0075*	3/4"	PSHC-10	
DH-2001-0100	1"	PSHC-12	
DH-2001-0125	1¼"	PSHC-16	
DH-2001-0150	1½"	PSHC-20	
DH-2001-0175	1¾"	PSHC-24	
DH-2001-0200	2"	PSHC-28	
DH-2001-0250	2½"	PSHC-36	
DH-2001-0300	3"	PSHC-44	
DH-2001-0350	3½"	PSHC-52	
DH-2001-0400	4"	PSHC-64	
DH-2001-0500	5"	PSHC-72	
DH-2001-0600	6"	--	
DH-2001-0800	8"	--	
DH-2001-1000*	10"	--	
DH-2001-1200*	12"	--	

*Special sizes - restocking charges apply on returns.

Other diameters and longer lengths quoted upon request.

Insulated Dryer Hose



Ideal for Heat Loss Problems!

INNER CORE DUCT: 2-ply Silicone/Fiberglass encapsulating a Spring Steel Wire Helix

OUTER DUCT: Black Neoprene

INSULATION: 1" Thick Fiberglass Between Inner and Outer Duct, Fortified With an Extra Wrap of Urethane Foam — If Space Is a Concern, ½" Insulation is Also Available by Special Order

STANDARD LENGTHS: 12'

TEMPERATURE RANGE: -65°F to +500°F

SIZES: Custom Sizes and Shorter Lengths available by Special Order

COLOR: Black with Orange Inner Core



PART NO.	HOSE I.D.	PRICE EACH
IDH-0150-1	1½"	Call for Pricing
IDH-0134-1	1¾"	
IDH-0200-1	2"	
IDH-0250-1	2½"	
IDH-0300-1	3"	
IDH-0400-1	4"	
IDH-0500-1	5"	
IDH-0600-1	6"	

Return Air Dryer Hose



1-PLY FEATURES:

- Ideal for Dryer Return Air & Low Temperature Dryers
- Economical Flexible Industrial Ducting

CONSTRUCTION: Single-Ply Neoprene-coated Fiberglass with Fiberglass Cord Reinforcement

STANDARD LENGTHS: 12'

TEMPERATURE RANGE: -40°F to +350°F

COLOR: Black

2-PLY FEATURES:

- Maximum Flow and Durability

CONSTRUCTION: Double-Ply Neoprene-coated Fiberglass with enclosed Spring Steel Wire Helix.

STANDARD LENGTHS: 12'

TEMPERATURE RANGE: -65°F to 300°F

COLOR: Black

PART NO.	HOSE I.D.	WORM GEAR CLAMP	PRICE PER 12' SECTION
1-Ply Sold in 12' sections			
RDH-1	1"	PSHC-10	Call for Pricing
RDH-114	1¼"	PSHC-16	
RDH-112	1½"	PSHC-20	
RDH-134	1¾"	PSHC-24	
RDH-2	2"	PSHC-28	
RDH-212	2½"	PSHC-36	
RDH-3	3"	PSHC-44	
RDH-312	3½"	PSHC-52	
RDH-4	4"	PSHC-64	
RDH-5	5"	PSHC-72	
RDH-6	6"	--	
RDH-7	7"	--	
RDH-8	8"	--	
RDH-9	9"	--	
RDH-10	10"	--	
RDH-12	12"	--	



PART NO.	HOSE I.D.	WORM GEAR CLAMP	PRICE PER 12' SECTION
2-Ply Sold in 12' sections			
RDH2-1	1"	PSHC-10	Call for Pricing
RDH2-114	1¼"	PSHC-16	
RDH2-112	1½"	PSHC-20	
RDH2-134	1¾"	PSHC-24	
RDH2-2	2"	PSHC-28	
RDH2-212	2½"	PSHC-36	
RDH2-3	3"	PSHC-44	
RDH2-312	3½"	PSHC-52	
RDH2-4	4"	PSHC-64	
RDH2-5	5"	PSHC-72	
RDH2-6	6"	--	
RDH2-7	7"	--	
RDH2-8	8"	--	
RDH2-9	9"	--	
RDH2-10	10"	--	
RDH2-12	12"	--	

Heavy Duty Suction Hose



*If you change hose with every color change,
this is the hose for you!*

FEATURES:

Heavy duty PVC, food grade, crystal clear, material handling hose. Designed with a corrugated construction for added flexibility and a smooth bore allowing for unrestricted flow. PVC compound complies with applicable FDA and 3A Sanitary Standards.

GENERAL APPLICATIONS:

- Pneumatic Conveying System for Dry Powder, Pellets or Granular Material
- More Cost Effective for Short Runs
- Ideal for Frequent Color Changes

SERVICE TEMPERATURE:

Static Condition: -4°F to +150°F

Dynamic Condition: +14°F to +104°F



PART NO.	HOSE I.D.	HOSE O.D.	WORKING PRESSURE @ 72°F (psi)	WORM GEAR CLAMP	APPROX. WT./ 100'	PRICE PER FOOT	
						25'+	FULL COIL
ESH1	1"	1.30"	50	PSHC-20	16#	Call for Pricing 800-627-1033	
ESH114	1¼"	1.57"	45	PSHC-20	22#		
ESH112	1½"	1.87"	45	PSHC-28	35#		
ESH134	1¾"	2.09"	45	PSHC-32	40#		
ESH2	2"	2.40"	40	PSHC-36	50#		
ESH214	2¼"	2.63"	40	PSHC-40	57#		
ESH212	2½"	3.00"	35	PSHC-44	73#		
ESH3	3"	3.56"	35	PSHC-52	104#		
ESH4	4"	4.60"	30	PSHC-72	165#		
ESH39	39mm	47.5mm	45	PSHC-28	35#		
ESH45	45mm	53.1mm	45	PSHC-32	40#		
ESH57	57mm	66.8mm	40	PSHC-40	57#		

Sold in 25', 50' or 100' sections only. Standard full coil length 100'.

To reduce dangerous static electricity, we suggest running a vinyl coated ground wire around the vacuum hose between the hopper loader and the metal intake tube in the material supply.

Don't Forget Your CLAMPS!

Ask your salesman to add the correct size WORM GEAR CLAMPS or SPIRAL BOLT CLAMPS to your order.

SHIPPING ARRANGEMENTS: UPS vs. FREIGHT

PART NO.	100'	75'	50'	25'
ESH1	UPS	UPS	UPS	UPS
ESH114	UPS	UPS	UPS	UPS
ESH112	UPS	UPS	UPS	UPS
ESH134	UPS	UPS	UPS	UPS
ESH2	UPS	UPS	UPS	UPS
ESH214	Freight	Freight	Freight	UPS
ESH212	Freight	Freight	Freight	UPS
ESH3	Freight	Freight	Freight	Freight
ESH4	Freight	Freight	Freight	Freight

Grounded, Heavy Duty Suction Hose



With Embedded Static Wire For Your Vacuum Loader

FEATURES:


Made of high quality, flexible PVC compound in compliance with FDA and 3A Sanitary Standards. USDA approved for meat and poultry plants. Clear high density PVC helix with embedded static wire, smooth inner surface for easy flow and easy cleaning.

APPLICATIONS:

Our Suction Hose with Static Wire is recommended for transmission of powder pellets or granular materials, and for transfer of edible food product, beverages, milk & milk products.

SERVICE TEMPERATURE:

+15°F to +150°F

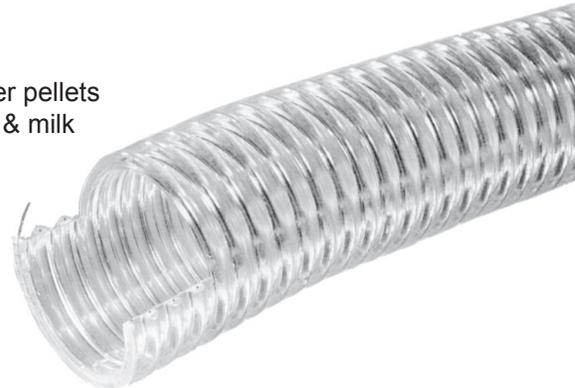

PART NO.	HOSE I.D.	HOSE O.D.	WORKING PRESSURE @ 70°F (psi)	WORM GEAR CLAMP	APPROX. WT./ 100'	PRICE PER FOOT	
						25' +	FULL COIL
ESH114W	1¼"	1.52"	50	PSHC-20	28#	Call for Pricing 800-627-1033	
ESH112W	1½"	1.79"	50	PSHC-28	31#		
ESH134W	1¾"	2.09"	45	PSHC-32	44#		
ESH2W	2"	2.36"	40	PSHC-36	52#		
ESH212W	2½"	2.93"	35	PSHC-44	81#		
ESH3W	3"	3.50"	35	PSHC-52	99#		
ESH4W	4"	4.50"	35	PSHC-72	140#		
ESH39W	39mm	45.5mm	50	PSHC-28	131#		
ESH45W	45mm	53.1mm	45	PSHC-32	44#		

Sold in 25', 50' or 100' sections only. Standard full coil length 100'.

**SHIPPING ARRANGEMENTS:
UPS vs. FREIGHT**

PART NO.	100'	75'	50'	25'
ESH114W	UPS	UPS	UPS	UPS
ESH112W	UPS	UPS	UPS	UPS
ESH134W	UPS	UPS	UPS	UPS
ESH2W	Freight	Freight	UPS	UPS
ESH212W	Freight	Freight	Freight	UPS
ESH3W	Freight	Freight	Freight	Freight
ESH4W	Freight	Freight	Freight	Freight

Don't Forget Your CLAMPS!

Ask your salesman to add the correct size
WORM GEAR CLAMPS
or SPIRAL BOLT CLAMPS
to your order.

Super Heavy Duty Suction Hose



Series "WT"

Best Price for Premium Quality!

FEATURES:

PVC, food grade, phthalate free, crystal clear, counter-clockwise spiral (LH), material handling hose, designed with a convoluted cover for increased flexibility and a smooth bore to eliminate material build-up. PVC compound complies with applicable FDA and USDA requirements and 3A Sanitary Standards. Uses counter-clockwise spiral (LH) double-bolt clamps.

GENERAL APPLICATIONS:

- Pneumatic Conveying System for Dry Powder, Pellets or Granular Material
- Best for Abrasive, Long-Term Continuous Runs

SERVICE TEMPERATURE:

Static Condition: -4°F to +150°F
 Dynamic Condition: +14°F to +104°F

Have a Conair™ loader? Note metric sizes.

PART NO.	HOSE I.D.	WORM GEAR CLAMP	SPIRAL BOLT CLAMP	APPROX. WEIGHT PER 100'	FULL COIL	PRICE PER FOOT	
						25'+	FULL COIL
SH114	1¼"	PSHC-20	--	28#	100'	Call for Pricing 800-627-1033	
SH112	1½"	PSHC-28	SDBC150-CC	35#	100'		
SH134	1¾"	PSHC-32	--	44#	50'		
SH2	2"	PSHC-36	SDBC2-CC	56#	100'		
SH214	2¼"	PSHC-40	SDBC225-CC	62#	100'		
SH212	2½"	PSHC-44	SDBC250-CC	77#	100'		
SH3	3"	PSHC-52	SDBC3-CC	110#	50'		
SH312	3½"	PSHC-64	SDBC4-CC	147#	50'		
SH4	4"	PSHC-72	SDBC4-CC	181#	50'		
SH39	39mm (1.54")	PSHC-28	SDBC150-CC	36#	100'		
SH45	45mm (1.77")	PSHC-32	--	44#	50'		
SH57	57mm (2.24")	PSHC-40	SDBC225-CC	62#	50'		



Sold in 25' increments.

To reduce dangerous static electricity, we suggest running a vinyl coated ground wire around the vacuum hose between the hopper loader and the metal intake tube in the material supply.

Counter-Clockwise Spiral (LH) Double-Bolt Clamps
 For a Total 360° Vacuum Seal



SHIPPING ARRANGEMENTS: UPS vs. FREIGHT				
PART NO.	100'	75'	50'	25'
SH114	UPS	UPS	UPS	UPS
SH112	UPS	UPS	UPS	UPS
SH39	UPS	UPS	UPS	UPS
SH2	UPS	UPS	UPS	UPS
SH214	Freight	Freight	Freight	UPS
SH212	Freight	Freight	Freight	UPS
SH3	Freight	Freight	Freight	Freight
SH4	Freight	Freight	Freight	Freight
SH45	UPS	UPS	UPS	UPS
SH57	Freight	Freight	UPS	UPS

Grounded, Super Heavy Duty Suction Hose



Best Price for Premium Quality!

FEATURES:

PVC, food grade, phthalate free, crystal clear, counter-clockwise spiral (LH), material handling hose with embedded static wire, designed with a convoluted cover for increased flexibility and a smooth bore to eliminate material build-up. PVC compound complies with applicable FDA requirements. Uses counter-clockwise spiral (LH) double-bolt clamps.

PART NO.	HOSE I.D.	WORM GEAR CLAMP	SPIRAL BOLT CLAMP	APPROX. WT. PER 100'	FULL COIL LENGTH	PRICE PER FOOT	
						25' +	FULL COIL
SH114W	1 1/4"	PSHC-20	--	33#	50'	Call for Pricing 800-627-1033	
SH112W	1 1/2"	PSHC-28	SDBC150-CC	43#	100'		
SH2W	2"	PSHC-36	SDBC2-CC	58#	100'		
SH214W	2 1/4"	PSHC-40	SDBC225-CC	65#	50'		
SH212W	2 1/2"	PSHC-44	SDBC250-CC	89#	100'		
SH3W	3"	PSHC-52	SDBC3-CC	125#	50'		
SH4W	4"	PSHC-72	SDBC4-CC	193#	50'		
SH39W	39mm (1.54")	PSHC-28	SDBC150-CC	43#	50'		
SH57W	57mm (2.24")	PSHC-40	SDBC225-CC	65#	50'		

Sold in 25' increments.

PART NO.	HOSE I.D.	WORM GEAR CLAMP	SPIRAL BOLT CLAMP	APPROX. WT. PER 60'	FULL COIL LENGTH	PRICE PER FOOT	
						25' +	FULL COIL
SH134W	1 3/4"	PSHC-32	--	17#	60'	Call for Pricing	
SH45W	45mm (1.77")	PSHC-32	--	29#	60'		

Sold in 20' increments.



GENERAL APPLICATIONS:

- Pneumatic Conveying System for Dry Powder, Pellets or Granular Material
- Static Wire for Grounding
- Paper Mill Vacuum Lines (for Pneumatic System Dry Material Transfer Only)
- Best for Abrasive, Long-Term Continuous Runs

SERVICE TEMPERATURE:

Static Condition: -4°F to +150°F

Dynamic Condition: +14°F to +104°F

Have a Conair™ loader? Note metric sizes.

We offer shorter lengths not offered by our competitors!


**Counter-Clockwise Spiral (LH)
Double-Bolt Clamps**
For a Total 360° Vacuum Seal



SHIPPING ARRANGEMENTS: UPS vs. FREIGHT				
PART NO.	25'	50'	75'	100'
SH114W	UPS	UPS	UPS	UPS
SH112W	UPS	UPS	UPS	UPS
SH39W	UPS	UPS	UPS	UPS
SH134W	UPS	UPS	UPS	UPS
SH2W	UPS	UPS	UPS	UPS
SH214W	UPS	Freight	Freight	Freight
SH212W	UPS	Freight	Freight	Freight
SH3W	Freight	Freight	Freight	Freight
SH4W	Freight	Freight	Freight	Freight

PART NO.	20'	40'	60'
SH45W	UPS	UPS	UPS
SH57W	UPS	UPS	UPS

Tigerflex "Urethane-1" For Your Vacuum Loader

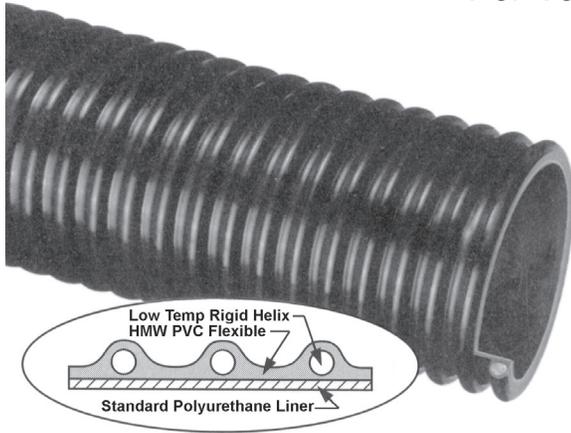

**Abrasion Resistant
Polyurethane Lined**

To reduce dangerous static electricity, we suggest running a vinyl coated ground wire around the vacuum hose between the hopper loader and the metal intake tube in the material supply.

FEATURES:

Polyurethane lined, abrasion resistant PVC material handling hose with counter-clockwise-spiral. Convuluted cover is made with low temperature, anti-static HMW PVC compounds for sub-zero flexibility. Smooth urethane liner provides resistance to abrasion and eliminates material build-up. Uses counter-clockwise-spiral double-bolt clamps.

GENERAL APPLICATIONS:

- Pneumatic Conveying System for Powder, Pellets, or Granular Material
- Industrial Vacuum Machines
- Abrasive Material Transfer
- Sand/Shot Blast Recovery Line

SERVICE TEMPERATURE:

Static Condition: -40°F to +150°F
Dynamic Condition: +22°F to +104°F
(Actual service temperature range is application-dependent.)

Available in Black Only

PART NO.	HOSE I.D.	WORM GEAR CLAMP	SPIRAL BOLT CLAMP	FULL COIL	PRICE PER FOOT
USH114	1-1/4"	PSHC-28	--	100'	Call for Pricing
USH112	1-1/2"	PSHC-28	SDBC150-CC	100'	
USH2	2"	PSHC-36	SDBC2-CC	100'	
USH212	2-1/2"	PSHC-44	SDBC250-CC	100'	
USH3	3"	PSHC-52	SDBC3-CC	50'	
USH4	4"	PSHC-64	SDBC4-CC	50'	

NOTE: Service life may vary depending on operating conditions and type of material being conveyed. Not for liquid handling use.

ALSO AVAILABLE:

**Clockwise Spiral
Double-Bolt Clamps**
For a Total 360° Vacuum Seal



**Other sizes available
upon request.**

Sold in 100' sections only.

A Safe, Convenient Hose for all Pneumatic Tools



FEATURES:

- Stretches and Recoils Like a Telephone Cord
- Lightweight
- Abrasion Resistant - Nylon 11
- Completely Oil Proof
- Male Swivel Fittings with Spring Guard Included On All Assemblies
- 200 psi at +70°F

TEMPERATURE RANGE: -40°F to +180°F

COLOR: Yellow

**Standard Duty, Self-Coiling,
Air Hose Assemblies**

PART NO.	LENGTH	NPT	PRICE EACH
SCH-06/12	12'	1/4	Call for Pricing
SCH-06/25	25'	1/4	
SCH-06/50	50'	1/4	
SCH-10/12	12'	3/8	
SCH-10/25	25'	3/8	
SCH-10/50	50'	3/8	

Blanket Purchasing Program



HUGE \$AVING\$

Large Volume Pricing doesn't have to mean buying more than you need. Now you can have increased buying power, while buying products as you need them. With our BLANKET PURCHASING PROGRAM, you'll get:

- **Lowest Prices**
- **Quick Delivery**
- **No Minimum Quantity Requirements**
- **Available for All Services For Plastics, Inc. Products**
- **Convenience (*Process just ONE Purchase Order for the entire year!*)**

There's no need to buy in bulk when you just don't have the space. Save time, money, and floor space with a BLANKET PURCHASE ORDER!

Call us today for more details!